


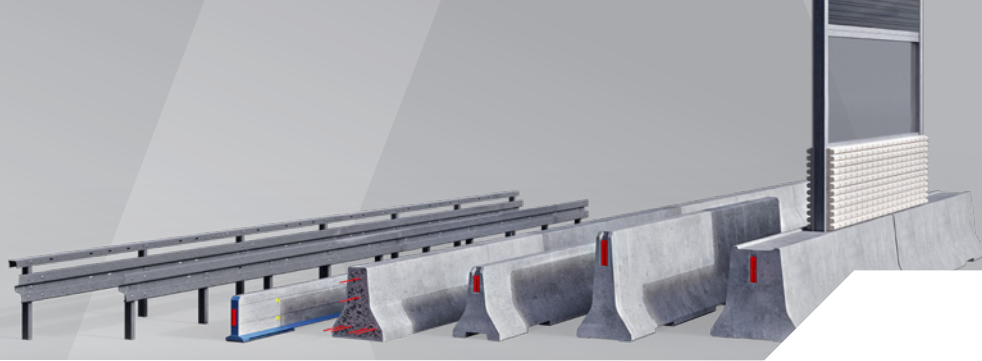

DELATABLOC®
SAFETY BARRIERS

SL 70 6m T180S N2 W4 B

surface mounted on asphalt or concrete

PRODUCT DATA SHEET


K764740B

Performance class	N2 W4 - B
Working width W_N	W4 (1,3 m)
Vehicle intrusion VI_N	- (- m)
Dynamic deflection	0,80 m
Tested system length	78 m
EC Certification report	725221830_9

Product series	SL 70 Series
Tension bar	T180S
Product variant	

System height	70 cm
System width	30 cm
Dimensions of element (l × w × h)	600 × 30 × 70 cm
Element weight / length	1.550 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt or concrete
Terminal anchoring	yes
Article number / Installation drawing	205805 / K764740

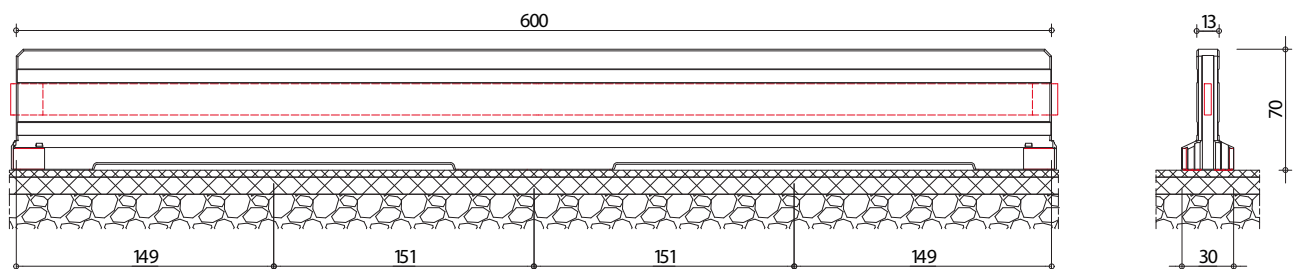

THE SUSTAINABLE SL 70 BARRIER **MINIMUM CARBON FOOTPRINT**

For temporary and permanent applications.
Lowest weight and highest performance.



KIRCHDORFER
ROAD & TRAFFIC

DELTABLOC®
HOME OF ROAD SAFETY

DELTABLOC INTERNATIONAL GMBH

Kirchdorfer Platz 2
2752 Wöllersdorf, Austria
office@deltabloc.com
+43 57715 / 470 – 0
deltabloc.com